



APP Quick Start Guide Wi-Fi Solar Camera



Please read the instructions carefully before using the product and keep it properly.
As the APP version is updated, there will be changes. This manual is for reference.

1. Packing list (please refer to the actual product)


- Camera×1
- Accessory package×1
- Bracket×1
- Manual×1
- Certificate of conformity×1

2. Preparation for use

- After getting this product, please turn on the device first; for the first use, please use the DC 5V2A charger with configuration The power cord to fully charge the device; (Built-in battery, charging for 6 hours)
- Download and open the App;
Search for "Tuya Smart" in the app store or scan the QR code on the manual to download and install the app;
For the first download and use, please click the "register" button to register an account; if you already have an account, click "Login" button.



3. Schematic diagram of interface description


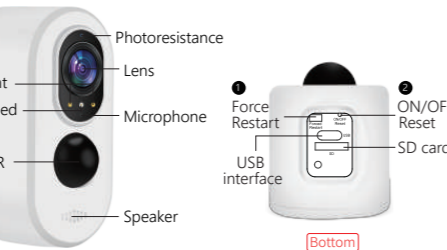


Button:
1 Force Restart: Press and release, power off and restart.
2 ON/OFF /Reset: In the shutdown state, press and hold for 3 seconds to automatically turn on the power, wait for the distribution network state, and when the red light flashes, press and hold for 5-9 seconds to reset the switching mode (single machine mode / package mode).
 Red light flashing fast
 Slow flashing red light
 When turned on: Press and hold for 10 seconds to automatically shut down.



Indicator light:
 Steady green: Charging, automatically turns off when fully charged.
 The red light keeps flashing : Wait to connect to the network.
 The red lights always on : In error state, please restart.
 The red light keeps flashing : The Network connection is in progress.
 The blue lights always on : The device is successfully connected.

4. Device connection

- If recording is needed, please insert the SD card (The chip of SD card is facing the USB interface)
 - Turn on the Bluetooth of your phone, then open the APP (The first time you use this APP, you need to register an account).
 - Start up and wait for a prompt sound and red light to flash quickly;
- When you enter the APP, the Camera will automatically popup to add. If not pop up, you can tap "Add Device", the Camera will be displayed at the top of the interface.
 - Tap "+" to add the Camera.



- Enter the password of your Wi-Fi (Only supports 2.4GHz Wi-Fi). Click "Next".
- Adding (Please wait for the Camera to be added). Click "Next".







5. A few reminders about the PIR humanoid detection feature.

- The humanoid detection sensitivity can be set in the device setting. When used in a crowded environment, it is recommended to turn off or set the device to low sensitivity to avoid unnecessary wake-up to prolong the battery service time.
- OFF : In this state, the device will not perform humanoid induction detection.
- Low : When the device is in hibernation state, it can sense movement detection within 3 meters and trigger to report.
- Middle : When the device is in hibernation state, it can sense movement detection within 5 meters and trigger to report.
- High : When the device is in hibernation state, it can sense movement detection within 8 meters and trigger to report.

6. Equipment instructions

- Alexa / Google** (The is not free.)
Support binding third-party software Alexa and Google to wake up the device.
- Alarm message**
Click on "Message" Notification to view the device's alarm message.



7. Matters needing attention

- PIR is sensitive to cold and hot disturbance, points should be noted during installation:
- Avoid placing the device in places where the air is churning. For example: air conditioning outlet, equipment cooling outlet, fan surrounding, curtain nearby, etc.
- Do not install the device directly in front of the glass or mirror.
- The recommended installation height of the device is about 2.5m-3m.
- Do not invert the device.

8. Troubleshooting



- Failed to configure the network:**
 - Check whether the device is configured.
 - Please ensure that the phone, camera and router are close enough.
 - Note that the device does not support 5GHz WIFI routers.
 - Check whether the router name and password are correct.
- Offline equipment:**
 - Check whether the router's Internet can be connected properly.
 - Check whether the router is connected to the camera. If the router is changed or the WIFI password is modified, please try to reset the device and reconfigure the network.
- Unable to preview:**
 - The server may be congested, please try to restart the APP.
- No message push:**
 - Please ensure that the APP has notification permission.
 - Please ensure that the alarm message push switch is turned on in the APP Personal Center Settings.
 - Please ensure that the PIR switch is turned on in the device settings.

9. Common Problems

- No video files:**
 - Please insert the SD card before starting up.
 - Please make sure the device PIR switch is on.
 - Please make sure the device recording switch is on.
 - Please check whether the SD card status is normal in the APP. If not, please try to format the SD card.
- Why does the battery drain so quickly?**
A: APP Playback video query will count the recording time every day. Please check whether there are too many videos every day. If there are too many false triggers, please try to lower the sensitivity setting of trigger.
Check whether the WIFI signal between the camera and the router is weak. Try changing the position of the router or camera to improve transmission between them.
- How do you ensure that the network connection between the camera and the router is normal?**
A: When you reach the camera, trigger the PIR and wait for about 5 seconds. If the camera indicator blinks quickly, it indicates that the camera cannot connect to the router smoothly.

4. Video Storage: SD Card Storage / Cloud Storage

- SD Card:** Can be inserted into the SD card to store videos (when the SD card is full, the video of the first day will be automatically replaced).
- Cloud Storage:** Available for purchase on the APP. (The is not free.)



7. Matters needing attention

- PIR is sensitive to cold and hot disturbance, points should be noted during installation:
- Avoid placing the device in places where the air is churning. For example: air conditioning outlet, equipment cooling outlet, fan surrounding, curtain nearby, etc.
- Do not install the device directly in front of the glass or mirror.
- The recommended installation height of the device is about 2.5m-3m.
- Do not invert the device.