## Frequently Asked Questions

# Indicator light is not ON

 Under normal conditions, the purple indicator light will be on when power is • Check if the router name and password entered by the APP are correct. on, and will be off after a few seconds, which is normal.

minutes, the product indicator will automatically turn off. It is normal.

If the indicator light is off during normal use, check whether the power

Check if the product input from above. This product only supports above

supply voltage is normal ( turn on handle blue indicator light is on.

After power-on, follow the instructions in the pairing procedure.

indicating that the power supply is normal).

- Check the position of the small redl switch, and strictly follow the positive flow At this point, the handle is closed and the blue indicator of the circuit breaker will be on.
- To start pairing, turn the small red switch to the "Compatible" position and Check whether there are multiple strong WIFI routers in the environment, and

phone to the local router to stay connected:

- temporarily shut down the unwanted routers: wait for about 10 seconds. The red indicator light will start flashing guickly: • Check if the WIFI router is 5G or 2.4G. This product supports 2.4G (if it is a Then, turn the small red switch back to the "quick" position.
- dual-band router, please change to 2.4G); If the product flashes quickly after power-on, pairing for more than three
  - Check whether there are too many devices connected to the WIFI router. Some routers have an upper limit on the number of access devices: • Check if the phone is connected to the Internet. You need to connect your
  - When there is no abnormality, you can select the compatibility mode to pair with the pairing process:
- If there is no result, temporarily turn off the WIF router; prepare anothe input and down output. mobile phone, turn on the hotspot signal of the other mobile phone, and try to Check if the neutral line N is connected to the power supply neutral line N pair. If possible, evaluate the status of the WFI router, or re-open the WIF according to the wiring diagram, and it cannot be grounded on the PE.
- Note: If the multi-pairing is unsuccessful and the purple indicator light is Note: The indicator light of this product flashes evenly into the guick pairing always in the slow flashing state, the following methods can be used; 1)The mode, and the even flashing is compatible with the pairing mode. device is displayed on the mobile APP but offline, and the device is deleted and re-paired, 2) Pairing with compatible mode, see the "Compatible Mode • Before power-on, the small red switch should be in the "quick" position. Pairing" method in this manual.

### WIFI connection failure

Off line processing

Check if the distance of the WIFI router is too far from the circuit breaker:

Check the WIFI router name, you can't use Chinese, you can't use specia

- Check if the WIFI router is working properly Check if the phone is connected to the Internet. • Check if the mobile phone is equipped with anti-virus software and other
- software that restricts access to specific APP. Check whether the product is connected to the line and the power is normal.
- Check if there is a strong electromagnetic field interference source around
- If there is no abnormality, exit the APP and re-login for a few minutes

# No feedback in operating status

 Check the internal settings of the Easy Micro-Link, the button operation interface, set a device and share the user operation notification, open and check the mobile phone operating system settings, set a notification, an easy micro-link, and allow the notification to be opened; (Android and Apple systems are slightly different)

## Other function description

 Operation feedback: mobile phone AP: control closing, after a few seconds, the APP displays the opening; or the APP shows that the opening and closing status is inconsistent with the switch, and check whether the lower terminal o the product has been tightened. It will return to normal after tightening. Incoming line type: Some users' distribution box is the lower line. If the product also adopts the down line, it will not work, the handle is stuck in the middle, and the product slides. Should be changed to the upper line, the way

internal function switch can be found through the "Professional Self-Test Window". Under normal conditions, the function switch should be kept at the upper end (the TEST position of the circuit board), and the product can be controlled normally, use. When it is necessary to test, you need professional electrician to operate, first disconnect the power supply → turn the function switch to the bottom  $\rightarrow$  the product incoming line is connected to the power supply. The product will automatically open and close the cycle → automatic operation about 100 times → indicating that the product is mechanically faultfree → After the power is turned off, turn the function switch back to the upper end to resume normal use.

Professional self-checking function: On the left side of the product, the

## Check the product small dial switch in the "quick" position $\rightarrow$ turn on the

power  $\rightarrow$  the purple indicator will light up, turn off after a few seconds after the indicator light goes out, turn the small red switch to the "compatible" position → wait for about 10 seconds → wait The red indicator light starts to flash quickly → After the indicator light flashes quickly → Turn the red switch to the "quick" position → No need to wait, then dial back to

> → Red indication after 10 seconds The light will start to flash slowly → open the phone to enter the APP to add interface → select the circuit breaker in t

the "Compatible" position → Wait for 10 seconds in the compatible position

# LAN local remote operation (special use case)

(1) The mobile phone is connected to the router WIFI, and the device

supporting the local mode function is added;

broadcasts to the device:

- (2) After the addition is successful, the APP can use the external network to control the device normally: Unplug the router cable
- (4) Wait a few minutes until the indicator light on the device turns into a flash
- (5) Click the "Enable Local Mode" button on the APP to start sending
- (6) If the local mode device is found within 60 seconds, the device enters the and then perform pairing operation. local mode. If it is not found, no device will enter the local mode (APP will only Before the product is used, the first pairing operation is required. After the look for 60 seconds, if it is not found, it will not find it again) pairing is completed, there is no need to re-pair the operation in subsequent
- (7) When the device enters the local mode, the indicator light of the device will become slow flashing 1;

"Earth" icon in the local mode device. The details interface will display the "Local Mode" text prompt, which can control the device normally.

• When operating and installing, be sure to carry out the power failure to ensure personal safety.

support the lower incoming line. Please wire it correctly. Please read the front part of this manual for the wiring diagram. Strictly follow the wiring diagram requirements, the position of the neutral line

• This circuit breaker is the upper line of the upper incoming line. It does not

the circuit breaker. To avoid product malfunction caused by load overload

• If the WIFI router changes during the use of the product, the product needs to

The product should be as close as possible to the WIFI router during use, as

WFI signal fluctuates and drifts, the product will be out of control offline.

If the line suddenly loses power during normal use, the product will remain in

the original closing state, and the control state will go offline. Subsequent

calls, waiting for a few seconds, the product will automatically go online again

The product should be installed in an environment with protection measures

such as waterproof, moisture proof, sun protection, etc., such as indoor,

of this manual.

short circuit, etc.

be re-paired.

waterproof distribution box, etc.

- When the maximum temperature is +40 °C, the relative humidity of the air does not exceed 50%. When the monthly minimum temperature of the and the live line cannot be exchanged, otherwise it will lead to inoperability or wettest month does not exceed +25 °C, the monthly average maximum product damage. Especially for 1P and 3P products, the neutral wire must be relative humidity of the month does not exceed 90%, and the daily average connected to the corresponding position, as shown in the front wiring diagram maximum relative The humidity does not exceed 95%, and the condensation on the surface of the product due to temperature changes is taken into When pairing operation, pairing should be performed in the no-load state of
- derated in high altitude areas. It is recommended to reduce the capacity by The product adopts internal power-on mode. Please ensure that the voltage 0% for each 1000m elevation. at the incoming terminal is stable and reliable. Wait for 7s for the first time The external magnetic field of the installation site should not exceed 5 times
  - the earth's magnetic field in any direction. This product supports mobile APP control, and also supports WeChat applet.

The altitude of the installation site should not exceed 2000m. It should be

In addition to meeting the temperature range of -5°C ~ +40°C national


standard, it can also operate reliably within the limit ambient temperature of -


Tmall elf, small love. Google, Yamaha and other control systems.

### far as possible to reduce the barrier of objects such as walls and ensure signal strength. If installed in the edge of the WIFI signal coverage, as the

- It is forbidden to use this product for illegal and criminal activities. If it leads to illegal crimes, all legal liabilities shall be borne by the user. It is forbidden to hand over the remote control equipment to children and
- unrelated persons to play and operate, so as to avoid the loss of personal property caused by misuse. • It is forbidden to use the equipment in the control of the car to avoid accidental
- traffic accidents caused by vibration and misoperation.

 The ZJSB9 series of intelligent miniature circuit breakers reflect the latest design concepts and manufacturing techniques, featuring compact size, lo IOT-BASED life, modularity, high breaking, and intelligent remote control. Applicable to A 50Hz6Hz, rated voltage 220V/380V, rated current to 125A, for switching or breaking, timing, delay and distributing electric energy and carrying rated current: and can overload and short circuit in line and equipment T MICRO CIRCUIT protection of the line and the electrical equipment in the case can also be used as the infrequent start-up and overload and short-circuit protection of the motor. More importantly, it can directly control the circuit breaker closing and opening control on the remote control device, and can be shared with other users through the extended function, timing, delay and other setting functions to meet the needs of different users.





# 73max




# Safety Lock

the following original position. In this case, the closing operation can be controlled normally.

The circuit breaker has an anti-missing mechanism.

- When installing, the terminal screws should be tightened, the wires are not
- When the anti-missing mechanism is in the pull-out position, the circuit breaker will remain in the opening position, and the circuit breaker cannot be closed.
- When the anti-missing mechanism needs to be reset to the original position, please operate as shown below.



# Maintenance

- Check whether the cross-sectional area of the wire is selected according to the actual current.
- Check whether the screws are loose or not tightened.
- Check the surface of the product for dust and insulation damage. If dust is found, it should be cleaned in time. If the insulation is damaged, it should be replaced in time.

loosened and pulled out, and the wire area is selected strictly according to the

- wire cross-sectional area requirements. • Do not operate the circuit breaker with wet hands, otherwise clicks may occur.
- The operating characteristics of the circuit breaker are set by the manufacturer, and it is not allowed to disassemble and adjust at will: in order to avoid malfunction of the product.
- After purchasing, the user needs to read the manual completely in the first time. If it is found that the customer cannot be used, or if the safety environment cannot be met, please stop using it in time and contact the manufacturer for return.
- When the product is at the end of its life, do not discard it at will, and decompose it properly. The interior contains silver precious metals and the


## Maintenance


Dust bearing: in line with GB/T 4208 8h

Maximum wiring capacity: 50mm2


Tightening torque: 4-5Nm

Meet the standard: GB/T 10963.1 IEC 60898-1 Rated voltage: AC 220V (1P, 2P) / AC 400V (3P, 4P) Rated frequency: 50Hz lumber of poles: 1P, 2P, 3P, 4P 200 Pollution level: Level 2 otection level: IP20 specified use temperature: -25 °C ~ +65 °C Rack rated current: 80A, 125A Rated current: 10A, 16A, 20A, 25A, 32A, 40A, 63A, 80A, 100A, 125A tantaneous tripping form: C Rated short-circuit breaking capacity: 6k/ Rated impulse withstand voltage: 6kA Mechanical life: more than 10,000 times Electrical life: more than 6000 times 1 2 3 4 5 7 101620 30 5070100 2 EMC performance: in line with GB/T 18449 Surge withstand: in accordance with GB/T 17626.5 voltage 4.0KV Salt spray bearing: in line with GB/T 2423.17 48h

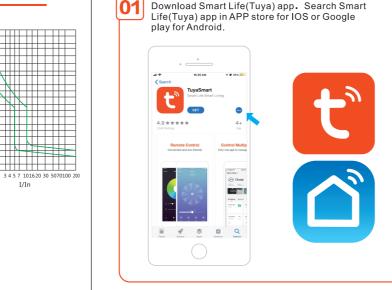







Add Device

This product does not protect against personal electric shock, line overvoltage

and undervoltage, and equipment leakage. Please pay attention to the scope of

• It is forbidden to install and disassemble the product under power supply to

When wiring maintenance or avoiding wireless remote control closing, b

Strictly follow the front diagram wiring operation, the neutral line and the fire

3P products. Failure to do so will result in inoperability or product damage.

Avoid connecting the inferior electrical load to the product for control; in order

to avoid accidental burning of inferior products, resulting in property damage.

When the circuit breaker protection trips, it is forbidden to perform the remote

Considering the signal path problem of WIFI router it is forbidden to use this

product in important facilities of fire control, elevator equipment, medical

equipment and emergency equipment. In order to avoid accidental

interruption or blockage of the WIFI signal channel, the device loses control.

In the extended functions of this product, such as delay, timing loop and other

If the user fails to use and construct according to the above terms, the user

Press"confirm indicator rapidly blink"button.

functions, there will be certain errors in time, please pay attention when

lifting operations can result in personal injury or property damage.

shall bear all consequences and legal responsibilities.

resulting in loss of personal property.

control closing operation without checking the line and troubleshooting. Blind


line must be connected to the corresponding position, especially the 1P and

sure to pull up the anti-missing mechanism to keep the circuit breaker in the

prevent human body electric shock and equipment short circuit.

[Note: Input WIFI password, Press "confirm" button. According to guide, Press "next". Enter Wi-Fi TP-LINK\_07F6 Chang

Connecting...



operating instructions

After pair successfully rename device then can work

If the pair failure, please refer the red font (Compatible Pair Mode)on the back of this manual.