



WiFi
SMOKE SENSOR
INSTRUCTION



Product configuration

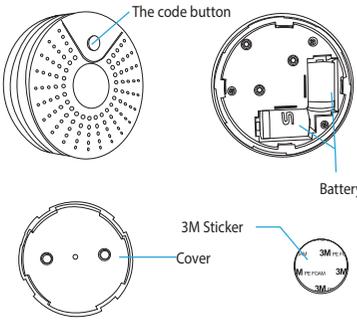

Reset:

- (1) Press open/off button for 6 sec,indicator light blink rapidly. Sensor into smart wifi mode.
- (2) Press open/off button for 6 sec again,indicator light blink slowly.Sensor into AP mode.

Specifications

Battery:CR2-3V x 2
Sleep current:25uA
Operating current:100mA-110mA
Standby time:5 years
Working time:1 year (20 times/day)
Wireless type:2.4GHz
Wireless standards:IEEE 802.11b/g/n
Wireless distance:45m
Working temperature:-10°C ~ 65°C (-4°F ~ 149°F)
Working humidity:20% ~ 85%
Alarm temperature:>50°C
Sound intensity:90db/1M
Storage temperature:0°C ~ 60°C (32°F ~ 140°F)
Storage humidity:0% ~ 90%
Size:71mm(L) x71mm(W) x 29mm(H)


Download App

1. Android phone:Download "Smart life" from Google play store
2. IOS device:Download "Smart life" from APP store.




Register and login

1. Run "Smart life"from your smartphone.
2. Register and login
3. Add Home

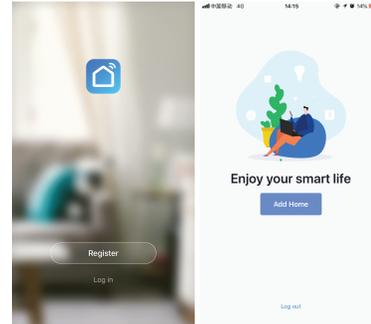


Add Device

Select the item that you want to add, add the device via Smart WiFi or AP mode

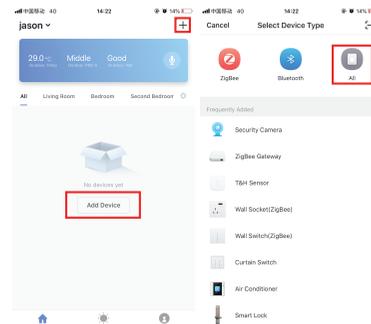


Network Configuration

Smart WiFi:
Pressing the resetting button for 6s, the LED will rapidly blink.that is Smart Wifi mode.

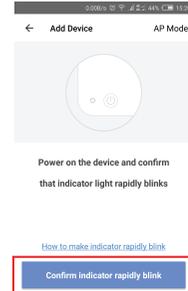


AP mode:
Pressing the resetting button for 6s after the LED blink rapidly,the device is in AP model to configure the network.

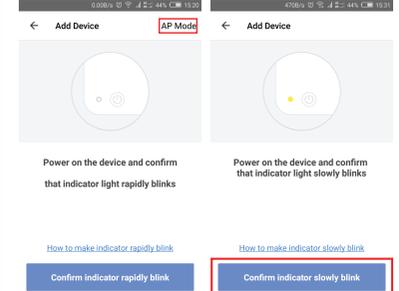

Main Function


1. Working state: alarm open/off (the device needs to be triggered for 3-5s)

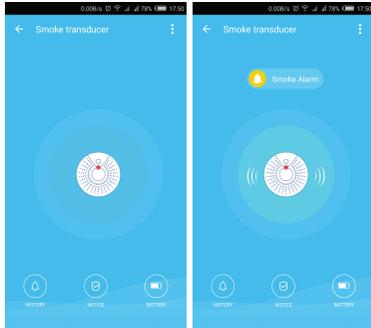

Alarm off

Alarm on


2. Alarm recording(click"HISTORY").
3. Turn Off/On push notification(click"NOTICE". No push notification when it's OFF,but it can be checked in the "notice")

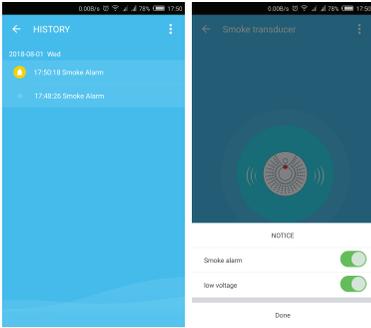

Alarm recording


Turn on/off the alarm

4. Linkage alarm setting:To connect two items via scene setting.

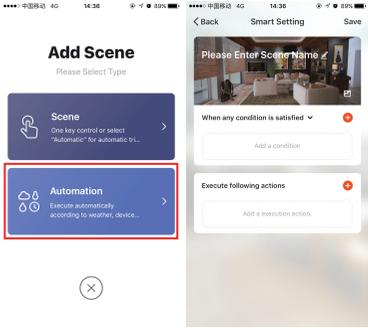


Device Sharing

Allow others to control the device by sharing device (note:you can delete the sharing in profile setting)

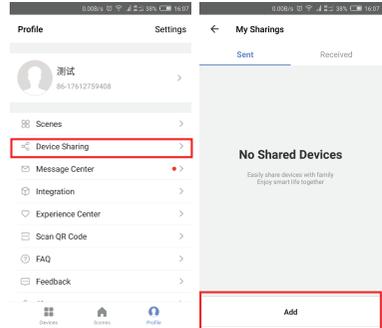


Push Notification

Enable to turn off.

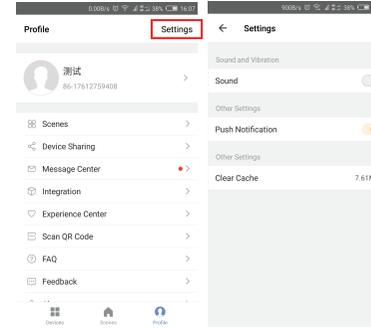

Remove device

The device will restore default settings.

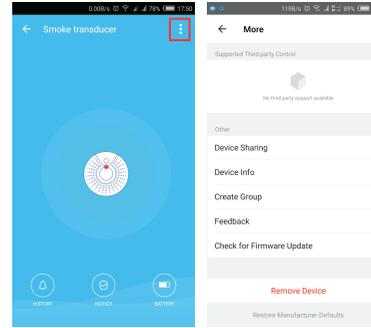

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	LED will rapidly blink,and OFF after scheduled time
Sleeping mode	Indicator OFF
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode



Make Your Home Smarter