





LIGHT SWITCH INSTRUCTION



Thanks for
Choosing our WiFi Smart Home Sensors

Product Configuration

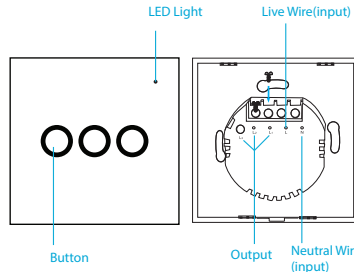

Specifications

Rated Voltage: AC 85-250V, 50/60Hz

Max Current: 1 outputs - Max 5A*1;

2 outputs - Max 5A*2;

3 outputs - Max 5A*3.

Wireless Type: 2.4GHz

Wireless Standard: IEEE 802.11b/g/n

Wireless Distance: 40m (max)

Operate Temper: 0°C - 40°C (32°F-104°F)

Operating Humidity: 20% - 85% non-condensing

Storage Temper: 0°C - 60°C (32°F -140°F)

Storage Humidity: 0% - 90% non-condensing

Product Type: EU- 1 / 2 / 3 Gang; US- 1 / 2 / 3 Gang

Product Size:

EU: 86mm(L) x 86mm(W) x 34mm(H)

US: 120mm(L) x 74mm(W) x 37mm(H)

Support: Amazon Alexa, Google Assistant, IFTTT



Smart Life



IFTTT

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	LED will rapidly blink, and OFF after scheduled time
Sleeping mode	Indicator OFF
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode

How to reset?

(1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.

(2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




2. Register and Login

- Launch the "Smart life" app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.
- Login if you have an account already.

3. Add Device

- Power on the smart sensor which default's mode is Smart WiFi mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- If the connecting fails, try using AP Mode
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

What's the App User Interface Like ?

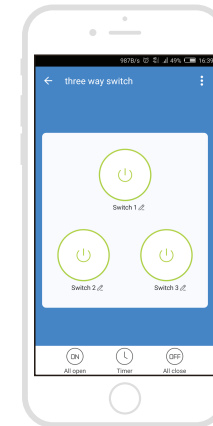

Smart life

Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main function

- Working status: on/off: press one button only, the button in the app will turn to green when it is ON;
- All on or All off: press the "All open" or "All close"
- Timing switch, can be timed single or Multiple switch, and can set repeat cycle (30s delay)

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter